
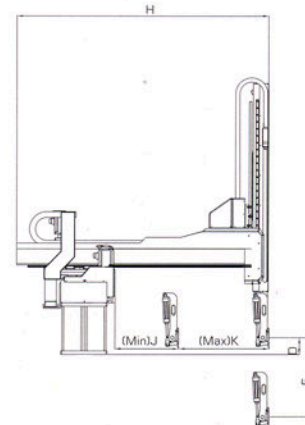


Main Specification

机 型 (Model)	单 位 UNIT	SVC-1500P	SVC-1800P	SVC-2100P	SVC-2500P	SVC-3000P
手臂型式 Type		双段(倍速式) (Telescopic type)				
适用射出成型机 I.M.M.range	ton	500~650	650~900	1600~2400	2400~2800	2400~3600
上下行程 Vertical stroke	mm	P:1500	P:1800	P:2100	P:2500	P:3000
前后行程 Crosswise stroke	mm	P:850	P:1000	P:1150	P:1200	P:1400
横行程 Swing stroke	mm	2200	2400	2600	3000	3000
姿势角度 Gripper rotation angle	°	90				
最大荷重(含治具) Max load(with tool)	kg	25	25	25	50	50
最小取出时间 Minimum take time	sec	3	3	4	5	5
空循环时间(不含治具) Dry cycle time(without tool)	sec	11	12	13	16	16
驱动方式 Drive System		X,Y,Z轴-伺服马达/3 axis servo motor				
工作气压 Working Air pressure	kgf/cm ²	5~7				
空气消耗量 Air Consumption	NL/cycle	24	24	24	40	40
电源消耗量 Power Consumption	KVA	7.6	7.6	7.6	12.6	12.6
电 源 Power		AC220V±10% 50/60Hz				
净 重 Net Weight	kg	750	850	950	1250	1350

▲ 空气消耗量 使用吸附时另外消费60NL/min ▲ Air Consumption for adsorption system 60NL/min

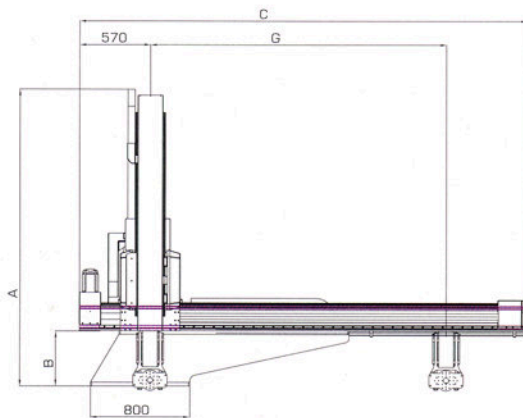

机型 Model	A	B	C	D	E	G	H	J	K
SVC-1500P	2035	400	3200	110	1500	2200	1850	280	850
SVC-1800P	2185	400	3400	110	1800	2400	2000	280	1000
SVC-2100P	2335	400	3600	110	2100	2600	2150	280	1150
SVC-2500P	2500	450	4300	150	2500	3000	2550	340	1200
SVC-3000P	2750	500	4300	150	3000	3000	2750	340	1400