

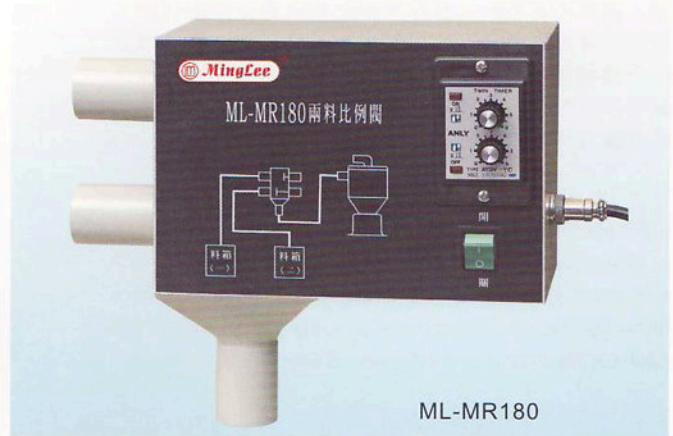
**ALIMAQ**

TODO EN MAQUINARIA INDUSTRIAL

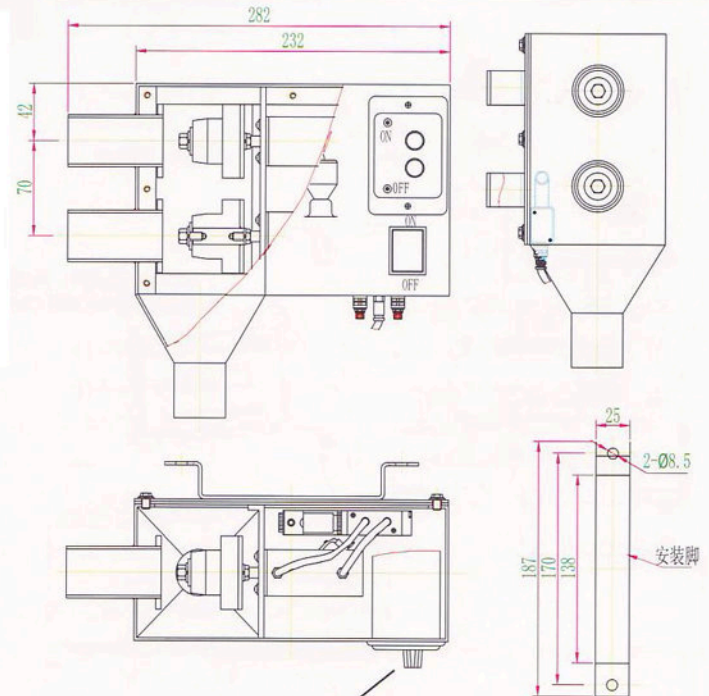
Tfno. y Fax 96 656 02 52
alimaq@alimaq.com**ML-MR180 II 兩料閥 ML-MR180 II MIXING VALVE**

ML-MR180 Mixing Valve is used with autoloader to control the loading volume thus the mixing ratio of both regrinding and virgin. Once the loading time of both regrinding and virgin is set, they can proportionally be mixed in the hopper so as to get stable plastic products.

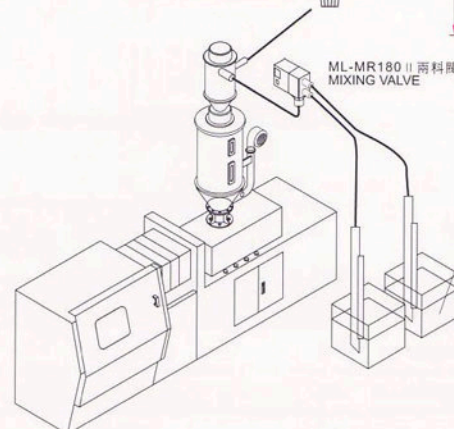
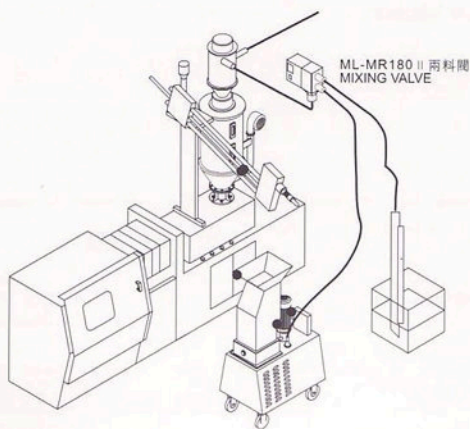
The control parts are all made of imported high-precise electric components with good performance and quality.



ML-MR180

**FEATURE:**

- 1.The ratio of both regrinding and virgin can be adjusted accordingly.
- 2.No mixing equipment is need to obtain a well-mixed effect.
- 3.No metering equipment is needed in mixing regrinding and virgin so as to save equipment investment, shorten production cycle and lower production cost.

**標準規格 Specifications:**

型號 Model	最大通過量 Max. flowrate	動力 Power source	驅動方式 Driving system	配管尺寸(mm) Pipe system diameter	外型尺寸(mm) External Dimension (L x W x H)
ML-MR180 II	800kg/hr	空氣 Compressed air	氣缸 Air cylinder	Φ38	282x132x245