




ML-SF自動篩粉裝置 ML-SF AUTO-SCREENING UNIT


本裝置為配合ML-SC系列強力粉碎機使用。粉碎機在碎料過程中會產生一定的細小粉末。此裝置的作用就是將這些粉末分離開來，使回收料的顆粒性能與新料保持一致，從而提升了制品的品質，降低了生產成本。

This device is used with ML-SC Strong Crusher to screen the tiny powder produced by the crusher while granulating. Therefore the separated regrinding can keep the same characteristics as those of the virgin so as to improve product quality and lower production cost.

ML-SF自動篩粉裝置工作原理圖 ML-SF SCREENING UNIT'S WORKING DIAGRAM

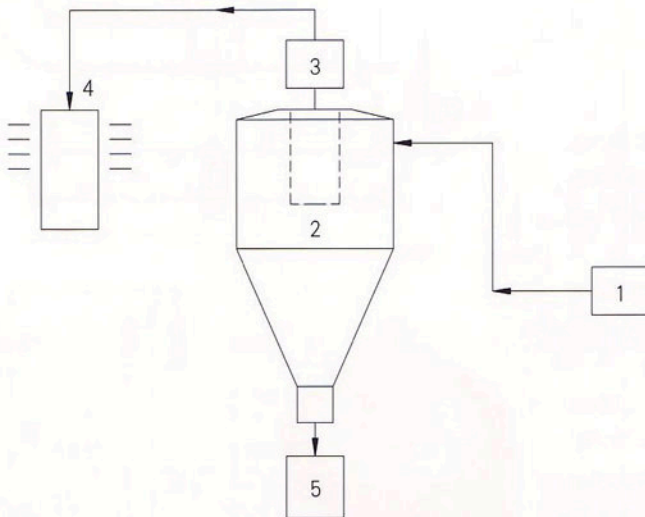

- 1、送料風機 2、篩粉分離桶 3、粉塵分離風機
4、粉末料出口 5、顆粒料出口

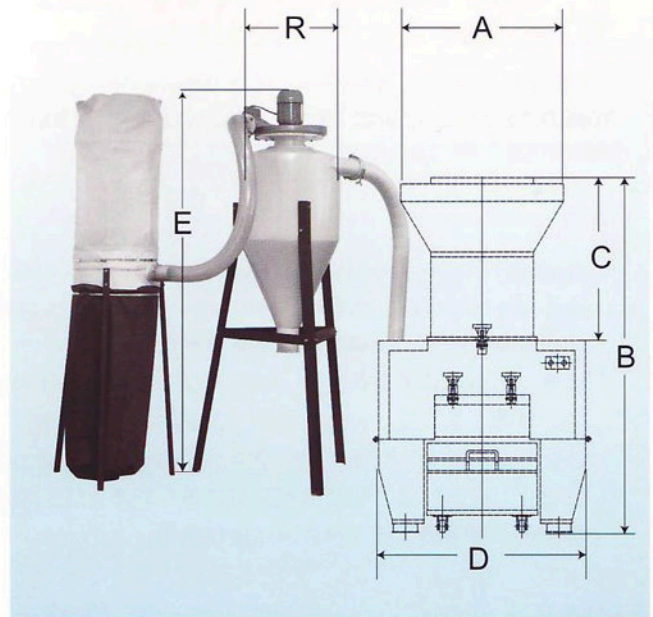

主要特點:

- 1.自動送料:利用真空吸料原理,把粉碎料自動送入分離器。
- 2.粉末自動分離:使粉碎過程中產生的粉末通過分離器從顆粒料中分離出去。

FEATURES:

- 1.Using vacuum to convey the regrindings into the separator automatically.
- 2.Dust powder can be automatically separated from the regrinding granules through this screening unit.

標準規格 Specifications:

型號 Model	外型尺寸 Dimension					
	A	B	C	D	E	R
ML(SF)2HP	350	1130	410	600	1940	Φ450
ML(SF)5HP	440	1250	530	635	1940	Φ450
ML(SF)10HP	615	1435	655	785	2120	Φ550
ML(SF)15HP	700	1540	695	900	2120	Φ550
ML(SF)20HP	795	1825	870	960	2380	Φ600
ML(SF)30HP	900	1900	910	1180	2380	Φ600
ML(SF)50HP	1105	2530	1360	1410	2550	Φ650
ML(SF)75HP	1360	3060	1610	2090	2550	Φ650
ML(SF)100HP	1600	3400	1895	2300	2550	Φ650
ML(SF)150HP	1500	4185	2300	2700	2550	Φ650